



Maximum Performance



UY65, UY80, UY105, UY135

FEATURES AND BENEFITS

- Freestanding, high spin
- Stainless steel front, side and top panels
- Stainless steel drum and tub
- 500 G extraction speed (UY65-105)
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Liquid soap connection

OPTIONS

- Stainless steel side panels
- Liquid soap pumps
- Liquid soap connection
- Water recovery kit
- Steam heating version
- Drain pump (UY65, UY80)

- 3rd water inlet
- USB + RS485 plug
- ECO version : lower kW rating on request


CONTROL

- UniLinc Touch
 - 7" full color touch screen display with swipe function: very intuitive for users
 - user-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
 - 20 standard wash programmes, total memory capacity for 99 programmes
 - Automated service reminders remind users to maintenance tasks
 - Water leak detection
 - Slow drain detection
 - Temperature-time verification

SOFTMOUNT WASHER-EXTRACTORS

TYPE		UY65	UY80	UY105	UY135
INNERDRUM					
Capacity 1:09	kg (lb)	7 (15)	9(19)	12 (26)	15 (33)
Volume	litres	65	75	105	135
Diameter	mm	530	530	620	620
DRUM SPEED					
Wash	rpm	49	49	49	49
Extraction	rpm	1298	1298	1200	1151
G-FACTOR					
		500	500	500	460
HEATING					
Electricity	kW	3 - 7	3 - 7	3 - 7	3 - 9
Steam	bar	1 - 8	1 - 8	1 - 8	1 - 8
Hot water	°C	90	90	90	90
Sound pressure level	dB (A)	< 65	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"	3/4"
Water pressure	kPa	100-600	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500	300-500
Water inlet	l/min	20	20	20	20
Drain valve	outer Ø mm	76	76	76	76
Flow amount with drain valve	l/min	210	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800	100-800
DIMENSIONS					
Size H×W×D	mm	1135×710×740	1135×710×790	1245×795×795	1245×795×945
Net weight	kg	170	185	210	255
TRANSPORT DATA					
Packed H×W×D	mm	1245×750×840	1245×750×840	1345×835×840	1345×835×985
Gross weight	kg	180	200	235	275

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	S	T	U	V	W
UY65	710	24	349	1135	582	240	730	642	48	180	940	480	88	230	1030	42	283	390	218	113
UY80	710	24	349	1135	582	240	780	692	48	180	940	480	88	230	1030	42	283	390	218	113
UY105	795	24	342	1245	617	240	785	692	48	180	1050	506	88	230	1140	42	293	475	218	113
UY135	795	24	342	1245	617	240	935	842	48	180	1050	506	88	230	1140	42	293	475	218	113

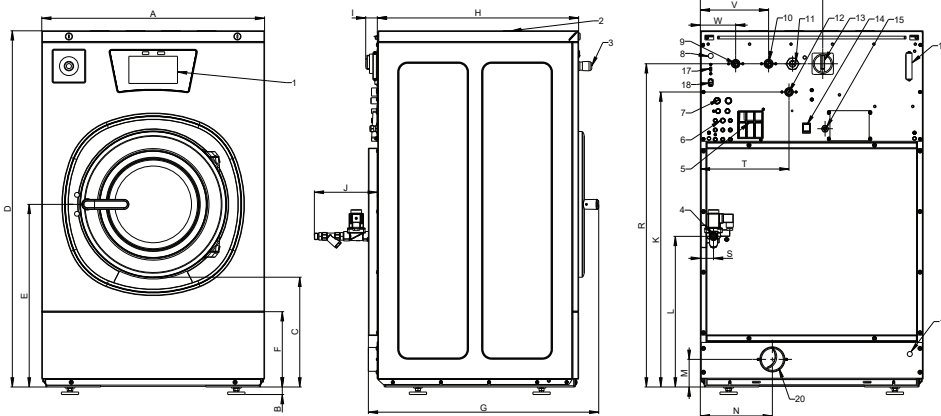

- | | | |
|-------------------------------------|--|---|
| 1. Control panel | 9. Cold water inlet, soft | 17. USB port - optional |
| 2. Soap dispenser | 10. Cold water inlet, hard | 18. PC programming connection |
| 3. Central stop button | 11. Electrical connection | 19. Discharge water cable inlet |
| 4. Steam connection | 12. Hot water inlet | 20. Drain valve <3 in (76 mm) |
| 5. Air relieve | 13. Main switch | 21. Drain valve 1/2", applicable for wash bath sample (on request only) |
| 6. Liquid soap connection | 14. Heating change-over switch | 22. Hidden USD port (under top cover) - standard |
| 7. Recycled water inlet | 15. Liquid soap pump electrical connection | |
| 8. Recycled water valve cable inlet | 16. Fuses | |

CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. www.unimac.com