



Maximum Performance



UDD300

FEATURES AND BENEFITS

- Frequency controlled motor
- Lint filter drawer for an user friendly maintenance
- Large door opening for easy loading and unloading
- Reversing drum as standard
- Standard galvanized drum with large diameter

OPTIONS

- Stainless steel front panel
- Stainless steel drum
- Double door glass
- Residual moisture control:


- electro conductivity of linen measured with ribs
- safe drying of delicate linen and overdrying prevention

CONTROL

- 2 tiers of controls available:
- **M9 OPL** - advanced microprocessor for OPL with 9 editable programs
- **UniLinc Touch** - 5" multilingual touch screen
- Cloud connectivity for 24/7 machine monitoring possible
- USB port for easy firmware updates, configuration and program uploads (Touch control)
- WiFi as standard execution for UniLinc Touch

STACKED TUMBLE DRYER

TYPE		UDD300	
CAPACITY			
Capacity 1:18	kg (lb)	2×16	
Drum volume	l	2×300	
Drum diameter	mm	2×760	
AIRFLOW		700/700; 1400	
DRYING AVERAGE		2×217	
MOTORS			
Fan	kW	2×0,37	
Drive	kW	2×0,37	
Electrical connection		208-240V 50/60Hz 1Ph - optional for gas and steam	
		208-240V 50/60Hz 3Ph - optional	
		380-415V +N 50/60Hz 3Ph - standard	
		380-415V 50/60Hz 3Ph - optional	
		440-480V 50/60Hz 3Ph - optional	
ELECTRICAL HEATING			
Energy	kW	2×13,5	
GAS HEATING			
Energy	kW	2×17,5	
Gas connection	inch	½"	
EXHAUST		Ø 200	
DIMENSIONS			
H×W×D	mm	2010×795×1245	
Net weight	kg	285	
TRANSPORT DATA			
Packed H×W×D	mm	2090×855×1320	
Gross weight	kg	305	

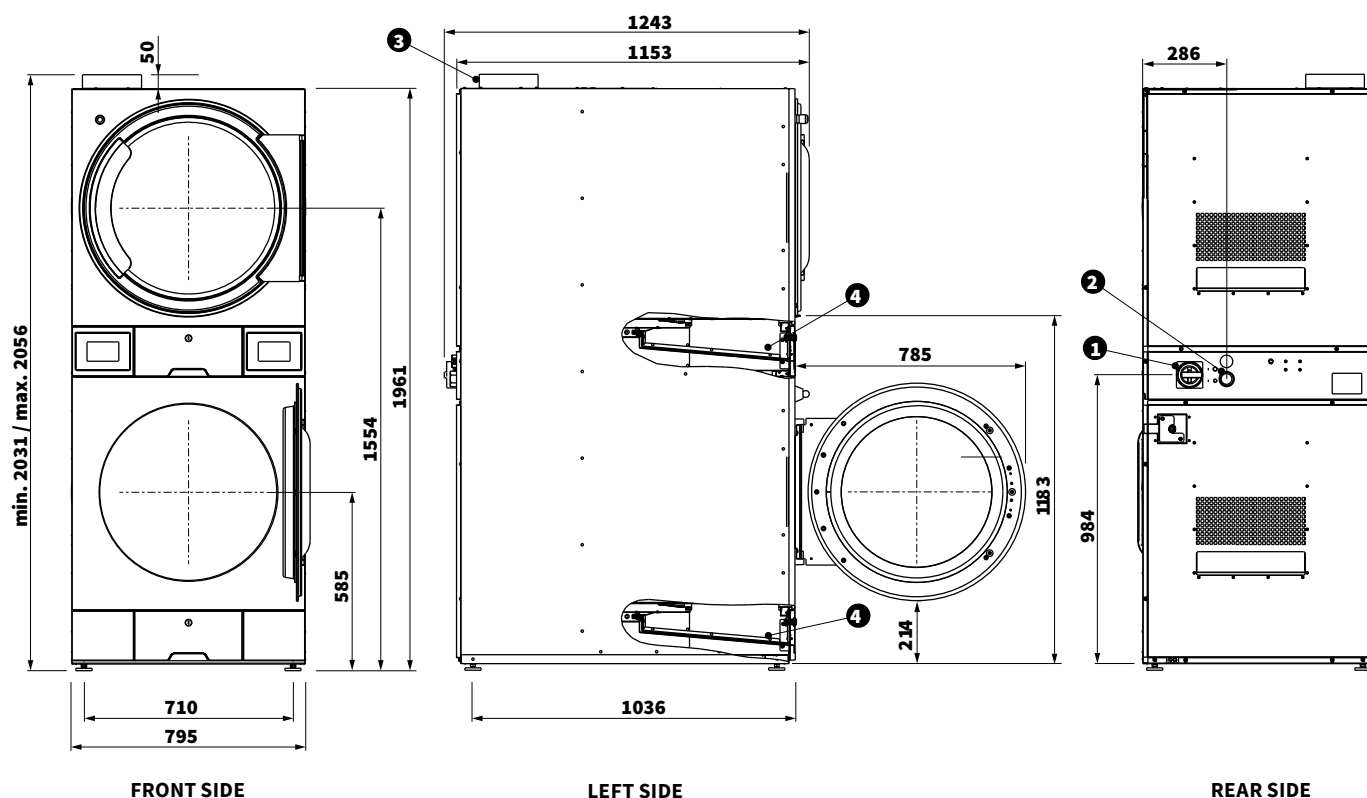

1. Main Switch
2. Main power supply
3. Exhaust
4. Filters

CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. www.unimac.com

UniMac by Alliance Laundry Systems