Maximum Performance



UDR540, UDR690

FEATURES AND BENEFITS

- Frequency controlled motor
- Front lint filter opening for an user friendly maintenance
- Large door opening for easy loading and unloading
- Reversing drum as standard
- Standard galvanized drum with large diameter

OPTIONS

- Stainless steel front panel
- Stainless steel drum
- Double door glass
- Residual moisture control for OPL models with M9 and UniLinc Touch control:
  - electro conductivity of linen measured with ribs
  - safe drying of delicate linen and overdrying prevention


CONTROL

- 2 tiers of controls available
- **M9 OPL -** advanced microprocessor for OPL only with 9 editable programs
- **UniLinch Touch -** multilingual 5” touch graphic screen for OPL with memory for 30 cycles
- Cloud connectivity for 24/7 machine monitoring possible
- USB port for easy firmware updates, configuration and program uploads (Touch control)
- WiFi as standard execution for UniLinc Touch

TUMBLE DRYER

TYPE		UDR540	UDR690
CAPACITY			
Capacity 1:18	kg (lb)	29 (64)	38 (84)
Drum volume	l	530	680
Drum diameter	mm	ø 930	ø 930
Airflow (gas heating)	m3/h	950 (1200)	1200 (1200)
Drying average	l/min.	384	560
MOTORS			
Fan	kW	0,37	0,37
Drive	kW	0,37	0,37
ELECTRICAL HEATING			
Energy	kW	30 / 36	36 / 48
Electrical connection		380-415 V +N 50/60 Hz 3 Ph 380-415 V 50/60 Hz 3 Ph 208-240 V 50/60 Hz 3 Ph* 440-480 V 50/60 Hz 3 Ph	
GAS HEATING			
Gas connection	NPT	½"	½"
Energy	kW	33	46
Energy	kBTU/h	112,6	157,9
Electrical connection		380-415 V 50/60 Hz 3 Ph 208-240 V 50 Hz 1 Ph	
STEAM HEATING			
Steam connection	inch	¾"	¾"
Steam pressure	bar	3-6 / 7-10	3-6 / 7-10
Steam output	kW	25,8-31,5 / 32,9-36,5	42,1-51,6 / 53,8-59,9
Electrical connection		380-415 V 50/60 Hz 3 Ph 440-480 V 50/60 Hz 3 Ph 208-240 V 50/60 Hz 1 Ph	
Exhaust	mm	200	200
Sound pressure level	dB(A)	60	60
DIMENSIONS			
Size HxWxD	mm	1975×965×1190	1975×965×1510
Net weight	kg	275	305
Transport Data			
Packed HxWxD	mm	2075×1040×1320	2075×1040×1540
Gross weight	kg	300	330

* not available with 48 kW electric heating

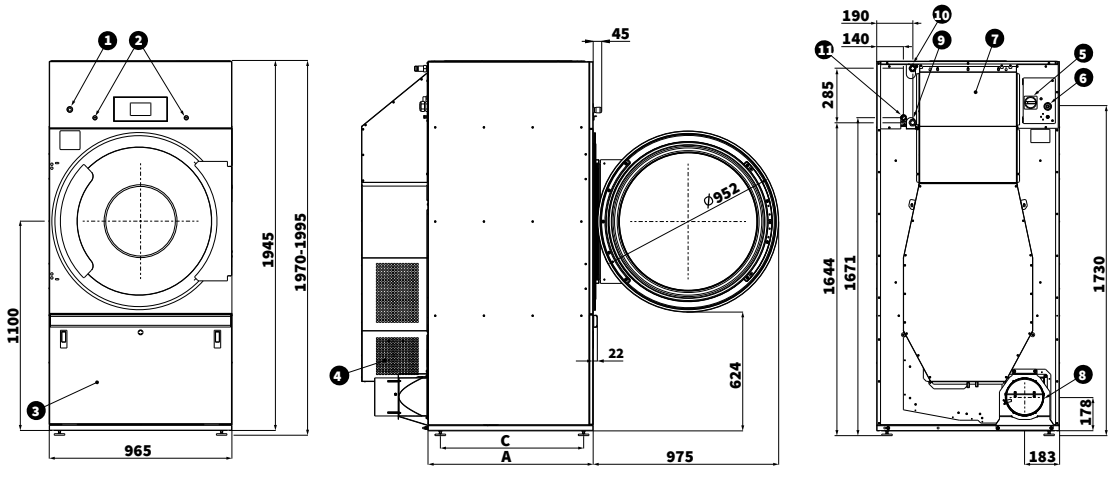

FRONT SIDE LEFT SIDE REAR SIDE

1. **Emergency STOP button**
2. **Lock of the control panel**
3. **Lint screen cover**
4. **Suction**
5. **Main switch**
6. **Main power supply**
7. **Heating chamber**
8. **Exhaust piping**
9. **Condensate drain**
10. **Steam supply (S models)**
11. **Gas supply (G models)**

TYPE	A	B	C
UDR540	868	1270	753
UDR690	1088	1490	973

08/2026

CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. **www.unimac.com**

UniMac by Alliance Laundry Systems