Maximum Performance



UY320

FEATURES AND BENEFITS

- Freestanding, high spin
- Stainless steel cabinet
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts
- Large door opening for easy loading & unloading
- Double layer door glass for thermal insulation and operator protection
- High volume water inlets
- Large drain valve (Ø 76 mm)

OPTIONS


- Liquid soap connection and pumps
- Tap to take water samples
- 3rd water inlet
- 2nd drain valve (for faster drainage or water recycling)
- Steam heating

CONTROL

- UniLinc Touch
  - 7" full color touch screen display with swipe function: very intuitive for users
  - fully programmable and customizable cycles for professional OPL operation
  - Up to 99 customizable cycles with step-by-step programming to support precise, repeatable wash processes, including site-defined hygiene procedures
  - Complete control content available in 36 languages, including a fully translated service menu
  - On-screen service support with machine information and audit data, a built-in maintenance schedule, live service information and an Inputs/Outputs menu for activating and checking individual components
  - Advanced connectivity with standard Wi-Fi and USB import/export for cycles and machine configuration

SOFTMOUNT WASHER-EXTRACTORS

TYPE		UY320
INNERDRUM		
Capacity 1:09	kg (lb)	35 (77)
Volume	litres	320
Diameter	mm	860
DRUM SPEED		
Wash	rpm	40
Extraction	rpm	980
G-FACTOR		460
HEATING		
Electricity	kW	21,9
Steam	bar	1-8
CONNECTION		
Electrical connection		200-240 V 50/60 Hz 3 Ph 380-415 V 50/60 Hz 3 Ph 440 V 50/60 Hz 3 Ph
Water valves connection	BSP	3/4"
Recommended water pressure	bar	3-5
Water inlet flow capacity (at 4 bar)	l/min	20 (59)
Drain valve	outer Ø mm	76
Flow amount with drain valve	l/min	210
Steam valve connection	BSP	1/2"
Steam pressure	kPa	100-800
Sound pressure level (extraction)	dB (A)	< 72
DIMENSIONS		
Size H×W×D	mm	1525×1080×1198
Net weight	kg	580
TRANSPORT DATA		
Packed H×W×D	mm	1665×1135×1220
Gross weight	kg	625

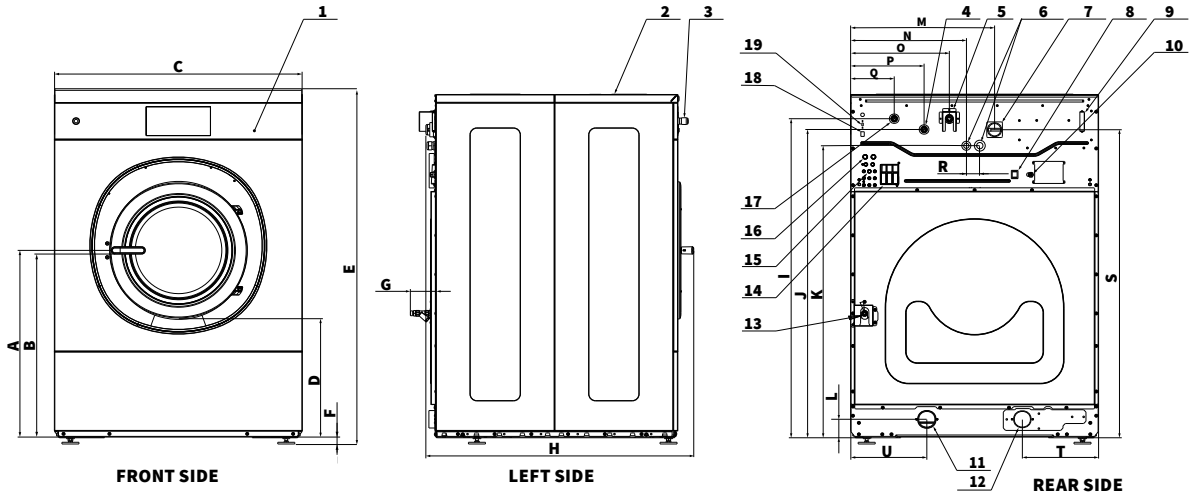

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
UY320	816	800	1080	516	1525	27	105	1198	1390	1342	1272	85	634	572	430	320	190	70	1342	332	332
			width		height			depth													

1. Control panel
2. Soap dispenser
3. Central stop button
4. Cold water inlet, hard
5. Hot water inlet
6. Electrical connection
7. Main switch
8. Heating change-over switch
9. Fuses
10. Liquid soap pump electrical connection
11. Drain valve -3 in.[76 mm]
12. Drain valve or recycle valve -3 in.[76 mm]- on request only
13. Steam connection
14. Air relieve
15. Liquid soap connection
16. Recycle water inlet
17. Cold water inlet, soft
18. PC programming connection
19. USB port

08/2026

CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

Alliance Laundry Systems preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

UniMac by Alliance Laundry Systems